BRIDGEPORT[™] STEEL garage doors



America's Favorite Garage Doors®

3-LAYER CONSTRUCTION




insulation technology

Clopay Bridgeport[™] Steel garage doors featuring Intellicore[®] insulation technology represent the ultimate smart choice for homeowners. Clopay's Intellicore[®] insulation is a proprietary polyurethane foam that is injected into our Bridgeport[™] Steel doors, expanding to fill the entire structure. The result is a door with incredible strength and durability. Its dense insulation also produces a quieter door, and with one of the industry's leading R-values of 18.4, it provides year-round comfort and improved energy efficiency.



BRIDGEPORT[™] STEEL garage doors

Bridgeport[™] Steel garage doors combine the traditional symmetry of wood stile and rail door designs with the proven durability of Clopay's three-layer steel construction. This provides exceptional strength and energy efficiency as well as quiet operation. The 2" or 1-3/8" thickness of Intellicore[®] polyurethane insulation with a thermal break makes these doors heat and cold resistant while the tongue-and-groove joint helps seal out wind, rain and snow. Available in narrow and extended recessed panel designs with multiple window options, three-layer Bridgeport[™] Steel garage doors are virtually maintenance-free making the beautiful look a lasting impression.



- Tongue-and-groove section joints help seal out wind, rain and snow.
- Replaceable vinyl bottom weatherseal in a rust-resistant aluminum retainer helps seal out the elements.
- 2" and 1-3/8" Intellicore[®] insulation filled doors come standard with 10-ball nylon rollers and heavy-duty 14 gauge steel hinges.
- Prepainted Standard White end stiles and interior steel backing create a clean, finished appearance.
- 2" and 1-3/8"Intellicore[®] insulation filled doors comply with 2015 IECC air infiltration requirement of 0.40 cfm/ft² or less (IECC, Section C402.5.2).





Calculated door section R-value is in accordance with DASMA TDS-163. Models with Ultra-Grain[®] finish and Black paint options are 25 gauge steel.

TRADITIONAL shaker style versatile design CHOICES

Model BD2EU; Shown in Sandtone with SQ24 Windows

DETAIL



A true recessed stamp replicates the timeless look of a rail and stile built wood door.

STYLE

6




Narrow Models BD1NU and BD2NU.





Extended Models BD1EU and BD2EU.

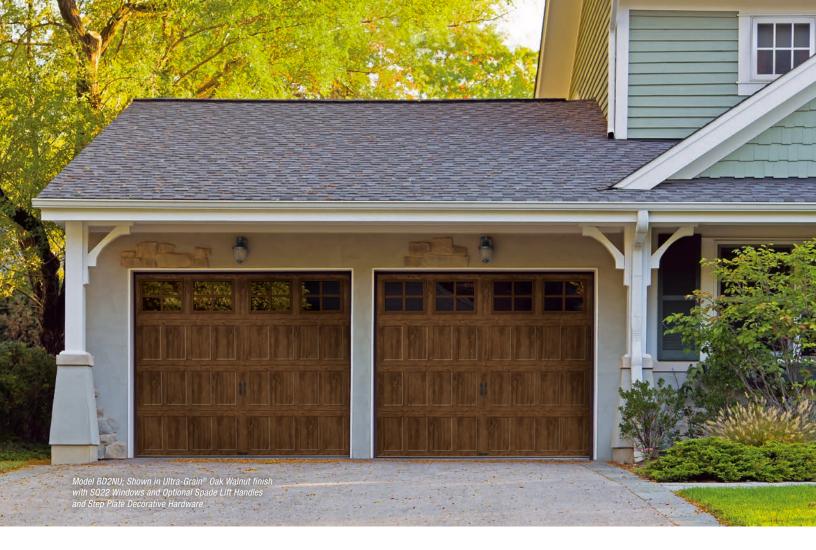

COLORS



- Exterior steel on solid colors has a natural woodgrain texture.
- Doors can be painted to match the home's exterior using a high-quality latex exterior paint.
 Do not use oil-based paint.

*Popular in select markets, Glacier White is a brighter white. † Additional charges apply. Due to the printing second colors may vary

Due to the printing process, colors may vary.

CUSTOM PAINT OPTION



Color Blast[®] finish offers more than 1,500 Sherwin-Williams[®] color options to complement your home. Clopay's durable two-part paint system has been thoroughly tested and is backed by a five-year warranty.

ULTRA-GRAIN® PAINT OPTION



Ultra-Grain[®] Oak Medium Finish



Ultra-Grain[®] Oak Dark Finish



Ultra-Grain[®] Oak Walnut Finish



Ultra-Grain[®] Oak Slate Finish

- Painted steel surface simulates a real stained door without the need of staining and the ongoing maintenance of wood.
- Oak woodgrain pattern runs horizontal along the rails and vertical along the stiles and panels for an authentic, natural look.
- Available in Medium, Dark, Walnut or Slate finishes that complement Clopay Entry Doors, shutters and other exterior stained wood products.
- Exterior steel surface on an Ultra-Grain[®] finish door has a stucco texture to create a more natural woodgrain appearance.
- Window frames, grilles and inserts are color matched to coordinate with the Ultra-Grain[®] finish patterns. All window options are available.

Additional charges apply.

NARROW PANEL WINDOW AND TOP SECTION OPTIONS

Doors range from 6' to 16' h	nigh and 7'8" to 20' wide.		Dealer for size op	ntions.	Illustrations simplified for clarit	iy.		9'0"-10'0"	10'6"-12'0"
MODELS BD1NU AND E	BD2NU	HEIGHTS							
		WIDTHS	7'8"-10'0"	11'6"-14'6"	14'10"-19'0"	19'2"-20'0"		7'8"-10'0"	7'8"-10'0"
Extended Solid Top					ARCH1				
Plain Short					Vertical Grille on ARCH1				
Plain Long					Grille on ARCH1				
REC12					ARCH2				
25011									
REC14					Vertical Grille on ARCH2				
SQ22					Grille on ARCH2	411 411	A h 4	A	b 411 6
SQ24					ARCH3				
Trenton [®] Short [†]					Vertical Grille				
Tenton- Short					on ARCH3	-			
Trenton® Long†					Grille on ARCH3				
Kristin [®] Short†					Clayton [™] Short†				
Mistin Short									
Kristin® Long†				<u>+++-</u>	Clayton [™] Long [†]				
Wrought Iron Short*†					Wrought Iron Arch*†	62000 62000	6366 63 		6360
Wrought Iron Long*†									

*Acrylic

[†]Complements Clopay Entry Door glass. Note: Due to stile width restrictions, some odd size door widths may allow only for the installation of a single handle. See your Clopay Dealer for details.


EXTENDED PANEL WINDOW AND TOP SECTION OPTIONS

MODELS		HEIGHTS 7'0"-8'0"	Illustrations simplified for clarit	y.	9'0"-10'0"	10'6"-12'0"
BD1EU AND I	BD2EU					
		WIDTHS 7'8"-10'0"	11'6"-14'6" 14'10"-19'0"	19'2"-20'0"	7'8"-10'0"	7'8"-10'0"
Narrow Solid Top			ARCH1			
Plain Short			Vertical Grille on ARCH1			
Plain Long			Grille on ARCH1			
REC12			ARCH2			
REC14			Vertical Grille on ARCH2			
SQ22			Grille on ARCH2			
SQ24			ARCH3			
Trenton® Short†			Vertical Grille on ARCH3			
Trenton® Long†			Grille on ARCH3			
Kristin® Short†	**		Clayton [™] Short†			
Kristin [®] Long†			Clayton [™] Long [†]			
Wrought Iron Short*†			Wrought Iron Arch*†	6360 6360 6	200 6200 6200 2000 6200	0 63360
Wrought Iron Long*†			3=31			

*Acrylic

[†]Complements Clopay Entry Door glass.

Windows in Detail

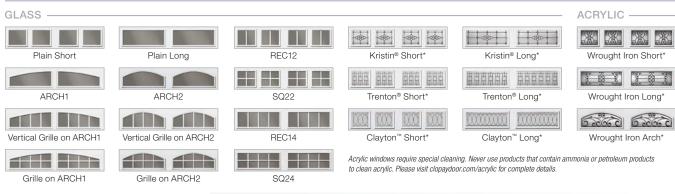

*Complements Clopay Entry Door glass Long and short windows may be used in any Bridgeport 3-layer model. Double-strength glass is standard. Optional obscure, 3/4" insulated and 3/4" insulated obscure glass is available on all Bridgeport 3-layer models. Additional charges for optional glass apply.

Windows are available single pane or insulated in clear, frosted, seeded, obscure and rain designs. Clear acrylic also available.

		- 1 SILL TRUTH SIL	
Clear Froste	d Seeded	Obscure	Rain

Additional Features



Large authentic arch window designs. Window frames, arilles and inserts are color matched to coordinate with the Ultra-Grain® finish patterns.

All Intellicore® insulated doors come standard with 10-ball nvlon rollers and heavy-duty 14 gauge steel hinges.

Hot-dipped galvanized

steel interior and exterior

primer and top coat help

maintenance-free door

with long-lasting beauty.

skins with a baked-on

ensure a virtually

See your Clopay Dealer for WINDCODE® door availability.

For more information please visit www.clopaydoor.com or try a design on your home by visiting: www.clopaydoor.com/door-imagination-system

Environmental Assurance

Clopay doors are compliant with environmental laws and regulations. Clopay doors do not contain HFCs. All Clopay doors are compliant with:

- California SB 1013
- New Jersey A-5583/S-3919 Greenhouse Gas Bill
- Washington HB 1112 Hydrofluorocarbon Greenhouse Gas Emissions
- Canadian regulations amending the ozone-depleting substances and halocarbon alternatives regulations



Visit clopaydoor.com or call 1-800-2CLOPAY (225-6729) for more information on Clopay, America's Favorite Garage Doors.







Decorative Hardware

STANDARD



OPTIONAL



Note: Decorative hardware options vary based on door widths. Standard hardware is not provided if a lock is chosen. Some odd size door widths may allow only for the installation of a single handle. See your Clopay Dealer for details.

Doors come standard with color-matched lift handles.


Spear Lift Handles[†] Spear Step Plate[†]



Spear Strap Hinge*†







Plates

Spade Strap Hinge* (Complements Spade Lift Handles and Spade Step Plate) [†] Aluminum construction. *Door may not open properly if installed near the top depending on opening dimensions and lift type. See your Clopay Dealer for more details.

Warranties





LIMITED 3 Y R WARRANTY



DESIGN YOUR DOOR **OPEN CAMERA**

AND POINT

